




501/423

Flameproof, Increased Safety, Dust Protection
Class - Zones
Certified ATEX / IECEx / c CSA us

- Two Independent Elastomeric Exd flameproof seals on cable outer sheath – The double seals provide superior cable retention over standard unarmoured Cable Glands
- Rounded Cable entry to prevent cable damage

The 501/423 dual certified Exe/Exd cable gland incorporates two independent seals and is intended for use on non-armoured elastomer and plastic insulated cables. This cable gland may be used with braided cables where the braid and outer sheath pass into the enclosure. For Exd application the cable must be suitable inline with 60079-14. The braid must then be suitably terminated inside the enclosure. The two seals provide superior cable retention over standard unarmoured cable glands. See technical section for installation rules and regulations.

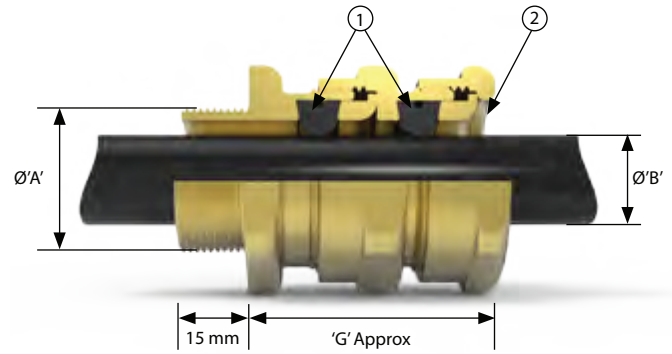

International Approvals



Cable Gland Selection Table

Size Ref.	Entry Thread Size 'A'		Cable Acceptance Details				'G'	Hexagon Dimensions	
	Metric	NPT* Standard	Outer Sheath 'B'					Across Flats	Across Corners
			Standard Seal		Alternative Seal (S)				
			Min.	Max.	Min.	Max.			
Os	M20 ²	½"	3.2	8.0	–	–	40.0	24.0	26.5
O	M20 ²	½"	6.5	11.9	–	–	40.0	24.0	26.5
A	M20	¾" or ½"	10.0	14.3	9.0	13.4	40.4	30.0	32.5
B	M25	1" or ¾"	13.0	20.2	9.5	15.4	44.3	36.0	39.5
C	M32	1¼" or 1"	19.5	26.5	15.5	21.2	47.2	46.0	50.5
C2	M40	1½" or 1¼"	25.0	32.5	22.0	28.0	49.5	55.0	60.6
D	M50	2" or 1½"	31.5	44.4 / 42.3 ¹	27.5	34.8	72.5	65.0	70.8
E	M63	2½" or 2"	42.5	56.3 / 54.3 ¹	39.0	46.5	64.8	80.0	88.0
F	M75	3" or 2½"	54.5	68.2 / 65.3 ¹	49.5	58.3	68.0	95.0	104.0
G	M80	3½"	67.0	73.0	–	–	68.0	106.4	115.0
H	M90	3½"	67.0	77.6	–	–	68.0	115.0	130.0
J	M100	4"	75.0	91.6	–	–	68.0	127.0	142.0

Os to F size metric entry threads are 1.5mm pitch as standard, 15mm length of thread. For G size glands and above, a 2mm pitch is supplied as standard, 20mm length of thread (1.5mm pitch with 15mm length of thread can be supplied) please specify when ordering. All dimensions in millimetres (except * where dimensions are in inches).

¹ Smaller value is applicable when selecting reduced NPT entry option.

² Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable outer sheath diameter is 10.9mm

Technical Data

Ingress Protection	IP66, IP67 and IP68 (30 metres for 7 days, special conditions may apply) to IEC/EN 60529 and NEMA 4X
Deluge Protection	Deluge Protection to DTS01
Operating Temperature	-60°C to +100°C
ATEX/IECEx	
ATEX/IECEx Protection Class	Ex II 2GD Ex db IIC Gb; Ex eb IIC Gb; Ex tb IIIC Db
ATEX Certificate No	CML 19ATEX1 167X
IECEx Certificate No	CML 19.0045X
Construction & Test Standards	IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7 and IEC/EN 60079-31
Additional Certifications	EAC: RU C-GB.AA87.B.00430 Inmetro: IEx 14.0272X India: PESO P450038 China: CNEEx17 2858X
NEC / CEC	
NEC Protection Class	Class I, Zone I, AEx eb IIC Gb; Zone 21, AEx tb IIIC Db
CEC Protection Class	Class I, Div.2 Groups ABCD; Class II Div.2, Groups EFG; Class III Ex db IIC Gb; Ex eb IIC Gb
c CSA us Certificate Number	CSA1015065
Construction & Test Standards	UL 60079-0, UL 60079-7, UL 60079-31, CSA 22.2 No: 60079-0, CSA 22.2 No: 60079-1, CSA 22.2 No: 60079-7, CSA 22.2 No: 60079-31, UL514B; UL1203; UL 2225



Ordering Information

Format for ordering is as follows: Alternative Seal (S), add suffix S to ordering information

Cable Gland Type	Size	Thread	Material	(Optional)
501/423	C	M32	Brass	S
501/423	C	1¼" NPT	Brass	S

Order Example: 501/423 C M32 Brass S