MTL product overview



Controlling, operating and protecting assets in harsh and hazardous areas

Powering Business Worldwide

More protection. More technology. Expect more.



De-risk by design

Engineering safer, more reliable and connected operations in the world's most demanding process environments.

MTL technologies help protect people, critical assets and process availability in demanding industrial environments. Part of Eaton's Crouse-Hinds series portfolio, MTL brings together intrinsic safety, signal conditioning, surge protection, industrial networking, HART interfacing and visualisation technologies to help customers build safer, more reliable and connected operations.

From field instrumentation through to control and monitoring systems, MTL combines specialist process-industry expertise with Eaton's global capabilities to help customers manage risk, improve system resilience and confidently support critical infrastructure.

Why MTL

Protect people and critical processes
Proven intrinsic safety and protection technologies help engineers manage risk in hazardous and safety-critical applications. MTL's portfolio includes intrinsic safety, signal conditioning and technologies used to control and protect assets in harsh and hazardous environments.

Connect field to control
Bring together intrinsic safety, signal conditioning, HART interfacing, industrial networking, fieldbus, surge protection and visualisation technologies across the process architecture. The current brochure itself demonstrates this breadth across the MTL portfolio.

Engineer with confidence
Combine specialist hazardous-area expertise with functional-safety credentials and engineering support to help simplify specification, integration and system design. Eaton's internal MTL material identifies application design support, project support, education and training as services supporting the portfolio.expertise.

Protect investment over the lifecycle
Support installed systems while providing pathways to modernise and evolve process infrastructure as requirements change. This is particularly consistent with your current focus on MTL resources for supporting, protecting and upgrading installed systems.

Contents

MTL scope of supply	6 - 7
MTL signal conditioning	8 - 9
MTL intrinsic safety solutions	10 - 13
MTL HART® interfacing	14 - 15
MTL FOUNDATION™ fieldbus solutions	16 - 23
MTL industrial network solutions	24 - 27
MTL network security	28 - 29
MTL surge protection solutions	30 - 33
MTL HMI & visualisation	34 - 39
Functional Safety Management	40 - 41
MTL product stewardship	42 - 43
MTL services & support	44 - 45



Many of the world's most safety-critical processes are monitored, controlled or protected by our products





The safety you rely on

Eaton is a leader in reliability, efficiency and safety with the development and supply of our MTL system infrastructure products and protection equipment especially suited for process industries.


Many of the world's most safety-critical processes are monitored, controlled, visualised or protected by our MTL product range and we are distinguished by our global network of sales and support centres, ensuring you are always safe in our hands, wherever you are.

We have a wealth of knowledge and expertise alongside an enviable reputation as a leading global provider of intrinsic safety explosion protection devices and systems for use in process control applications. Key applications also include fieldbus and industrial network components, HMI and visualisation, surge protection, alarm management and gas analysis. To add to this Eaton is the first provider of process instrumentation to be certified as a Functional Safety Management (FSM) company.

Our MTL product range is used in all types of locations, both hazardous and general purpose; from offshore oil and gas platforms, power production plants and petrochemical installations to pharmaceuticals, telecommunications and other manufacturing/process plants. Dedication to our customers and recognition of industry requirements continues to drive our development of new products to ensure we deliver the best values and solutions to meet our customers' needs.

At Eaton, we provide one of the world's largest portfolio's of electrical equipment for explosive, classified and industrial areas. Offering unsurpassed product reliability, quality and efficiency with industry-leading innovation and design certified for global specifications. Eaton delivers proven solutions for harsh and hazardous environments.

MTL scope of supply

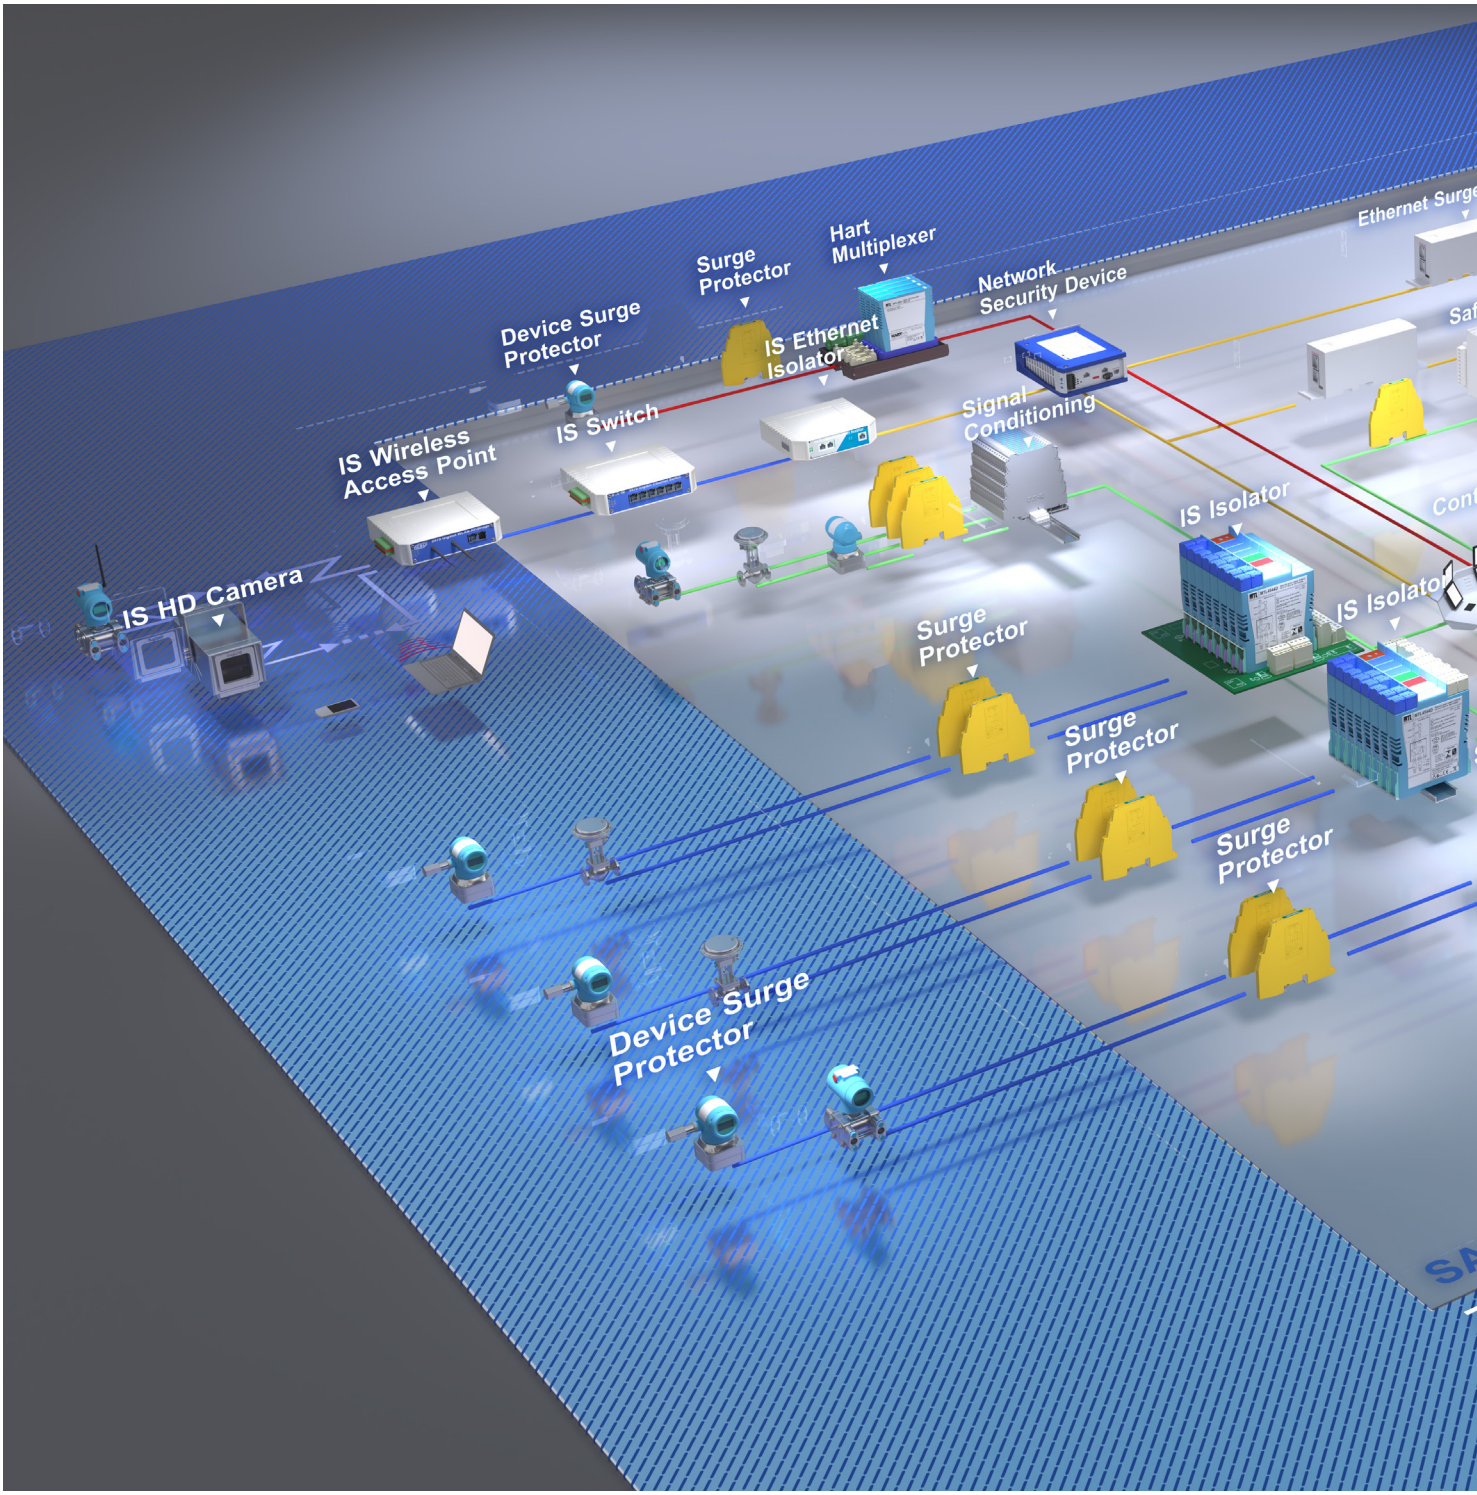

Controlling, operating and protecting assets in harsh and hazardous areas


Functional Safety Annunciator
Protection
Area Annunciator
Redundant FISCO Power Supply
Redundant Filedbus Power Supply
Megablock
Industrial HMI
Zone 2 HMI
Zone 1 HMI
Megablock
Safety Barrier
Temp. Mux. Receiver
Isolator
Exd Annunciator
IS Megablock
Fieldbus Barrier
Temp. Mux. Transmitter
Temperature input
GECMA 10.1" IS Tablet
ZONE 1

MTL signal conditioning

With process plants now spread over wide areas and the demand for more information, the transfer of electrical signals present many challenges. High power devices mixed in with low level signal transfer generates an environment which has an adverse effect on the ability to control and measure the processes.

Signal conditioning makes a major contribution to resolving issues such as varying grounding potentials, reducing signal noise and eliminating earth loops. It also protects sensitive control equipment from dangerous voltages. Many different signals from sensors such as thermocouples, RTDs, position monitors, pressure and flow monitors are all accommodated. These benefits add up to reduced down time, fewer failures, greater product yield and significant cost savings.

Signal conditioning is used in many industrial processes, in addition to the industries

Eaton's MTL products are well known for, through our intrinsic safety and process IO portfolio.

We apply our extensive expertise in signal conditioning and interface technologies to deliver reliable, high-performance solutions for a wide range of industrial applications, making Eaton a trusted, single source for your interface requirements..



MTL signal conditioners

MTL1000 range




Signal isolators

The MTL1000 range of signal conditioning isolators, trip amplifiers and accessories are designed to help protect field instruments and control systems to provide safe, reliable process communications.
This cost-effective solution offers significant savings with its embedded DIN-rail mounted power-bus and compact design. The optional MTL1991 power-bus feed and alarm module offers added power security with the application of dual power feeds with individual supply monitoring.

Backplane mounted signal conditioners for integration into DCS, ESD and fire and gas systems

MTL4600 range

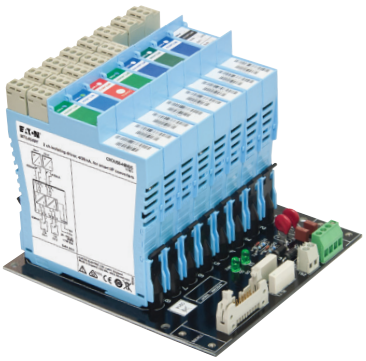

Backplane mounted signal isolators

Building on the base of the MTL4500 range, the MTL4600 offers a high level of signal isolation for installations where multiple loops on a common connection are not desirable.

Signal isolation provides excellent protection against surges, common faults and noisy environments. It also eliminates the risk of earth loops between different areas of the plant, which if not isolated, can cause significant errors or failures under fault conditions.

The MTL4600 isolators are fully compatible with all existing backplanes used with the MTL4500 range and many control systems. The form factor and signal types offer the user a common approach for both IS and non-IS signals.



MTL intrinsic safety solutions

For over 40 years, Eaton's MTL intrinsic safety interface products have been world leading, with a range of barriers, isolators and integrated IS solutions to help prevent explosions in process industries. Whatever the application, our products help to protect investments in hazardous areas.


The products range from industry renowned IS barriers and isolators through to sophisticated process control products, all designed for the harsh environments often encountered in the process industry.

As part of our 'customer commitment' process, we regularly produce educational reference material to assist users in understanding the latest regulations and directives.

The intrinsic safety concept simplifies circuits and permits live maintenance within the hazardous area

MTL intrinsic safety isolators


MTL4500 range



Backplane mounted intrinsic safety isolators

The MTL4500 range is the next generation of backplane mounting intrinsic safety isolators. Utilising innovative planar transformer technology at its heart and extensive automation in construction, the MTL4500 range offers industry leading features and performance in a single package. It is designed with the requirements of system vendors in mind, for 'project focussed' applications such as Distributed Control Systems (DCS), Emergency Shutdown Systems (ESD) and Fire and Gas monitoring (F&G). With fast module installation, easier system integration, improved performance from low-power circuit designs and more I/O channels in each module giving the highest packing density on the market plus 3 port isolation as standard.

MTL5500 range

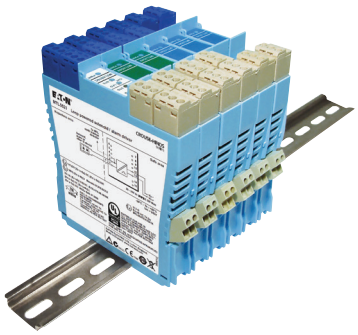


DIN-rail mounted intrinsic safety isolators

The MTL5500 range of intrinsic safety isolators are DIN-rail mounting and meet the needs of the IS interface market for "application focussed" projects. These range from single instrument loops, through various combinations and enclosures to fully equipped cabinets, across all industries where hazardous areas exist. The MTL5500 range has a slim, compact housing and the range of module options contains both single and multiple channel devices which enables the user to choose the functionality and integrity needed without sacrificing cabinet space. The modules can be used for a wide variety of interface tasks for process instrumentation. All signal wiring is made through removable connectors which facilitates fast installation and simple maintenance procedures.

MTL intrinsic safety barriers

MTL7700 range

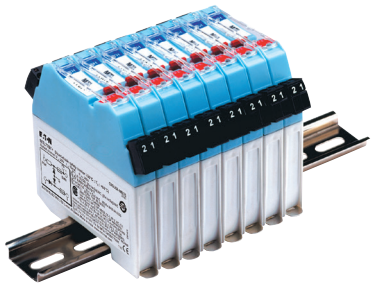

Din-rail mounted safety barriers

The MTL7700 range follows closely in the footsteps of the MTL700 but as a DIN-rail mounting barrier providing quick and easy installation without the need for special hardware. Removable terminals are used for ease of installation, maintenance and for providing a loop disconnect by simply unplugging the terminals from the side of the module. The barriers clamp simply and securely onto standard T-section DIN rail, simultaneously making a reliable IS earth connection. When the MTL7700 range is used in conjunction with the MTL7798 power feed module the user has a fully protected, electronically fused supply to many barriers with no additional wiring required. The MTL7700 is the replacement for the MTL700 range, which is now terminated. A special adaptor bracket is available to mount the MTL7700 on the MTL700 earth bar.

MTL intrinsically safe indicators

MTL660 range



Loop powered indicators

The MTL660 range of indicators are loop powered units and the low voltage drop across their input terminals allows them to be installed in almost any 2-wire, 4-20mA loop. Large liquid crystal displays make the process variables easily visible at a distance and a backlight option may also be ordered for use in low light conditions. Process units are configured into the display area. Instant readout of percentage or loop current is available at the push of a button. Field mounting units are housed in a rugged aluminium IP67, NEMA 4X case. GRP options are available for highly corrosive atmospheres.

MTL analogue multiplexer system

MTL830C

Temperature Multiplexer system for Zone 0 hazardous area applications


MTL830C analog multiplexer system with Modbus® outputs provide a cost-effective alternative to single-loop isolation. The cost of installed wiring is reduced by up to 50% by communicating the input of multiple hazardous-area sensors over a single twisted pair data highway. Further savings are achieved by reducing the number of inputs to the host, cabinet space and weight.

An analog transmitter, mounted in the hazardous area, supports thermocouple, RTD, potentiometer and mV analog inputs. A compatible safe-area receiver provides serial Modbus® outputs for feeding to host PLC, PC or DCS controllers.

The data highway cable, a simple twisted pair or a pair of wires within a core cable, connects the transmitter and receiver for carrying both power and data over distances up to 2km. If the analog transmitter is located in the hazardous area, the data highway must be protected by an MTL5553 digital isolator.

Multiplexer systems can communicate the status of up to 32 inputs, reducing the number of hazardous area wiring pairs from 32 to one.

Reduce costs by eliminating long runs of expensive thermocouple compensation cable from the hazardous to the safe area. Also, if 3- or 4-wire RTDs are used, costs are reduced by terminating each RTD at the transmitter or its enclosure. Accessories include stainless-steel enclosures, a USB cable, and a PC-based configuration software package.

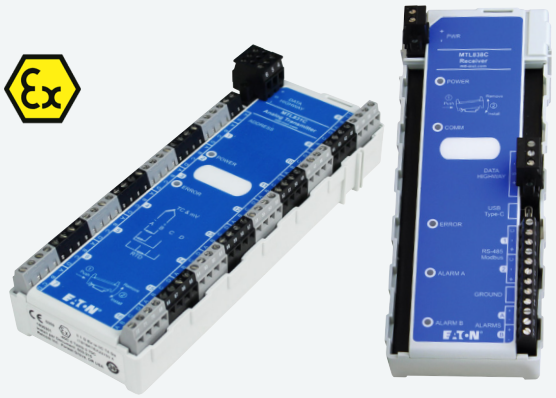

Reduce the cost of installing hazardous-area cabling

World leading intrinsic safety interface products



Custom, standard and universal backplanes for easy DCS integration

MTL custom solutions

Our range of backplanes, enclosures and accessories provides comprehensive, flexible and compact mounting solutions for system vendors, original equipment manufacturers and end users alike.

- Total flexibility
- Special functions
- Reduced wiring
- Signal conditioning
- Simplifies installation
- HART® integration

Customised backplanes

Eaton provides a complete design and manufacturing service for customised MTL backplanes. These solutions enable process control and safety system vendors and users to integrate compatible MTL signal conditioning and interface modules directly into their system architecture, providing a flexible approach that can simplify design and help reduce costs.

DCS vendors/systems supported

ABB Automation
S800

Emerson
Delta V, M series,
S series

Bentley-Nevada

HIMA
HIMax

Honeywell
PMIO, C200, C300, UPIO,
Safety Manager, USIO

Rockwell Automation
ICS Triplex, Plantguard

Schneider Electric
Foxboro, Triconex Trident/
Tricon, Modicon

Siemens
ET200, S7

Yokogawa
Centum R3, VP, N-IO
ProSafe RS, SN-IO





More detailed MTL intrinsic safety product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/intrinsic-safety

MTL HART® interfacing

Every HART® field device is capable of providing significant data about its performance and the process it is controlling. Don't ignore such a valuable asset!

If you have smart field devices installed and you are not making full use of their capabilities, then you need our HART® connection system. Our MTL HART® products provide the connections between the HART® field instruments, the control systems and the process automation maintenance software.

The MTL HART® multiplexer system provides on-line access from a PC to the HART® field devices for monitoring device performance. HART® devices may be selected for regular status monitoring and alerts to be issued if the status changes.

Eaton's MTL solutions for HART® connection systems include a comprehensive range of reliable products, software, services and training



More detailed MTL HART® product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/hart-interfacing-multiplexers

Featured product

MTL multiplexers

MTL4850/MTL4854

HART® multiplexers

The MTL4850 HART® multiplexer provides a simple interface between smart devices in the field, control/safety systems and HART® instrument management software running on a PC. The system is based on 32-channel modularity to provide a compact, easily configurable and expandable system.

The new MTL4854 mounts on the same range of backplanes as the MTL4850 but includes four HART® modems that enable simultaneous communications with connected field devices to be carried out.

- Designed to mount directly to a range of customised connection units
- MTL4850 designed for use with SIL3 loops (non interfering)
- MTL4854 designed for use in partial-stroke test valve positioner applications
- Connect over 2000 loops on one RS485 network



MTL multiplexers

MTL4851/MTL4852




HART® connection systems

The new MTL4851 and MTL4852 HART® connection system provides a simple interface between smart devices in the field, control systems and HART® instrument management software run on a PC. The system is based on 16-channel modularity to provide a compact, easily configurable and expandable system. Each node on a standard RS485 network can support up to 256 channels through multiple secondary modules controlled by a single master.

- Designed to mount directly to a range of general purpose HART® connection units and IS backplanes
- Provides a simple interface to smart devices in the field
- Connect up to 7936 HART® devices on a single RS485 network
- LED indication for fault diagnosis
- Auto baud rate detection
- Connectivity to HART® configuration and Instrument Management software (IMS)

MTL backplanes

Custom and universal backplanes

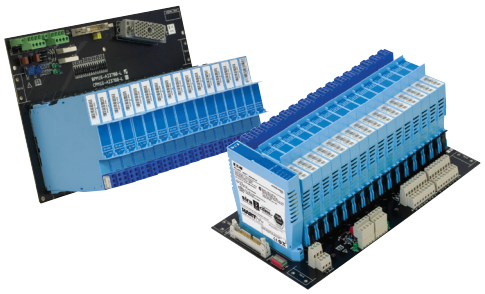

System integration

As every plant is different, Eaton offers a wide range of both generic and customised MTL HART® connection boards for all types of installations to offer the optimum solution.

On board isolation, filtering, signal conditioning, labelling and system specific connectors combine to offer customer related solutions. Whatever the application, we have, or can design, an integrated solution to allow simple, flexible and space effective connection to your control system. Installations worldwide show that users everywhere recognise the quality and reliability of our MTL integrated solutions.

MTL FOUNDATION™ fieldbus solutions

FOUNDATION™ fieldbus H1 provides an open, non-proprietary fieldbus network for control systems and field instruments. It is intended primarily for process control, field-level interface and device integration.

H1 is designed to operate on twisted pair instrument cabling and also supports Intrinsically Safe (IS) applications. Each device communicates via an all-digital, two-way communications system.

Eaton provides a comprehensive range of MTL fieldbus power supplies, wiring components, diagnostic tools and displays for FOUNDATION™ fieldbus H1 networks.

Our complete range of MTL fieldbus physical layer components deliver an unrivalled source for system specifiers and all parties involved in the design, installation and commissioning of FOUNDATION™ fieldbus networks.

Solutions to integrate with all fieldbus control system suppliers




Fieldbus topologies for all applications

Energy Limited Trunk (ELT) - the FISCO network in zone 1

FISCO provides the framework for assembling intrinsically safe (IS) fieldbus networks in zone 1 hazardous locations. In a FISCO installation, the fieldbus trunk and all spurs are IS, meaning that 'live-working' may be permitted on any part of the network in the presence of a flammable atmosphere and without gas-clearance procedures. This characteristic means that FISCO is recognised as the safest of all explosion protection methods, and is frequently chosen where safe activity in hazardous areas is the primary concern.

High Energy Trunk (HET) - the fieldbus barrier network in zone 1

Fieldbus barriers are widely adopted for FOUNDATION™ fieldbus networks where there is a requirement to connect to intrinsically safe field instruments in zone 1 hazardous areas. The advantages of fieldbus barriers, when used as part of a 'High Energy Trunk' concept, are the ability to support heavily loaded segments and long trunk cable lengths, while retaining the ability to conduct 'live-working' on the intrinsically safe spur connections.

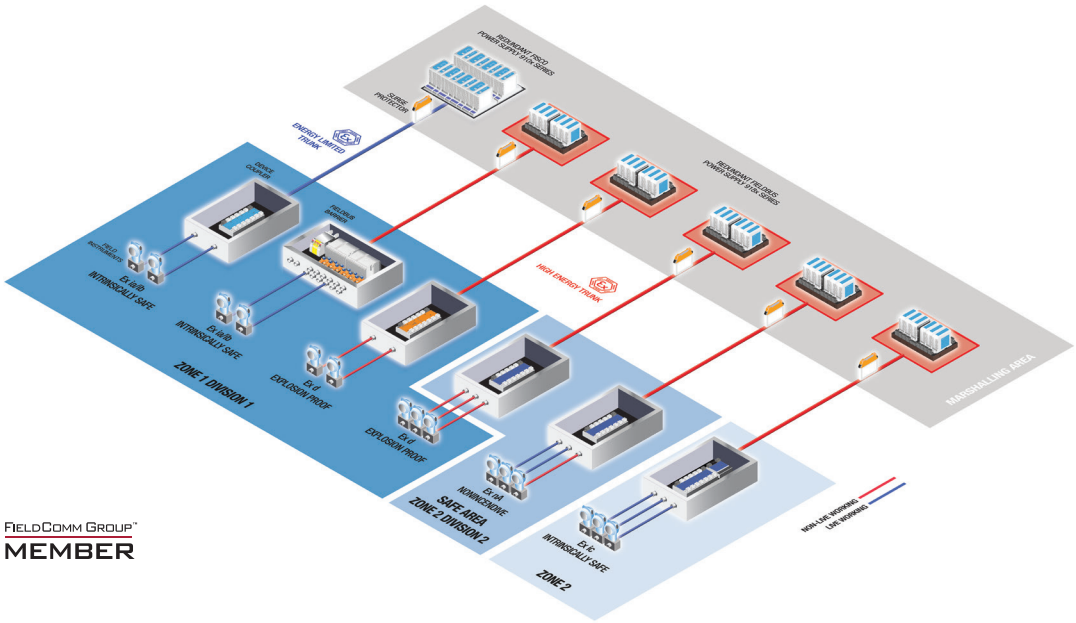

Ex d instrumentation in zone 1/division 1

High Energy Trunk networks provide high levels of power to the field wiring of fieldbus installations, allowing heavily loaded fieldbus segments and extending the overall segment length. When used in hazardous area applications, the key restriction is that the fieldbus trunk and spur wiring must not be interrupted whilst powered. Where this can be accommodated, High Energy Trunk provides a simple, robust and reliable installation.

The High Energy Trunk network in zone 2/division 2/safe area

This High Energy Trunk architecture is used for general purpose safe area applications. Additionally the device coupler can be mounted in a zone 2 or division 2 hazardous area with connection to Ex nA or Ex d certified field devices.

In division 2 applications, the spurs may be live-worked if the field devices are certified with non-incendive field wiring parameters.

Ex ic in zone 2 hazardous areas

The removal of the 'Ex nL' (energy limited) Ex protection method from the IEC 60079-15 standard, and the introduction of intrinsic safety protection level Ex ic, is driving installers of fieldbus networks to adopt solutions that support Ex ic spurs. Our solution uses a standard fieldbus I/O and power supply cabinet layout as the Ex ic voltage limiting is located in the fieldbus junction box minimising the size and cost of the control room cabinets.

MTL fieldbus barriers

NEW

Fieldbus barrier, 6/12 spur

The 937x-FB2 fieldbus barrier and the 937x-FB3 compact fieldbus barrier range are field-mounted wiring hubs that create six or twelve intrinsically safe spur connections from a high-energy trunk, for connection to suitably certified FOUNDATION™ fieldbus H1 instruments. Capable of supporting heavily loaded fieldbus segments and long trunk cable lengths, the fieldbus barrier may be installed in zone 1 (gas) or zone 21 (dust) hazardous areas, with the trunk wiring implemented using suitably protected cable and increased safety (Ex e) connection facilities.

Each intrinsically safe spur is capable of supporting a FISCO or 'Entity' certified fieldbus device located in a zone 0 or 1 hazardous area. The short-circuit protected spurs are galvanically isolated from the trunk and require no protective ground connection in the field.

The key modular components of the 937x-FB2 system (fieldbus barriers and surge protectors) may be 'hot-plugged' by design and without gas-clearance procedures or separate isolating switches. This virtually eliminates the risk associated with hazardous area maintenance activities, speeds module replacement and avoids the need for specialist operator training.

- For FOUNDATION™ fieldbus networks in hazardous areas
- Complete enclosure system for 6 or 12 intrinsically safe spur connections
- Mount in zone 1 (gas) or 21 (dust) with spurs connected into zone 0
- Compatible with FISCO and Entity certified fieldbus instruments
- Compact, modular construction
- Ergonomic mechanical design
- Pluggable system components, without 'gas free' constraints
- Optional, integrated surge protection for trunk and spurs

Featured products

Eaton make fieldbus easy in safe and hazardous areas

MTL fieldbus wiring components

Fieldbus Ex ic solution

The removal of the 'Ex nL' (energy limited) Ex protection method from the IEC 60079-15 standard, and the introduction of intrinsic safety protection level Ex ic, is driving installers of fieldbus networks to adopt solutions that support Ex ic spurs.

Eaton's MTL F30 Ex ic adaptor enables such networks to be assembled, when used in conjunction with the 9180 range of 8-segment redundant power supplies and F300 range of megablock device couplers. Typically, one F30 adaptor is used with each fieldbus segment and is installed with the megablock in the field enclosure. Power to the Ex ic segments is provided by 9192-FP modules installed on the 9180 power supply carriers. When connected to suitably certified fieldbus instruments in zone 2 hazardous areas, the spurs may be live-worked in accordance with normal intrinsic safety procedures. This allows field devices to be connected to the network while it is energised in the hazardous area. Unlike competing products in which the trunk must be treated as a 'partial' intrinsic safety circuit, our solution provides clear separation between the non-arcing (Ex nA) trunk and the intrinsically safe (Ex ic) spurs, thereby avoiding complex rules for wiring in the marshalling cabinet. Further, it is compatible with all host H1 control systems that comply with basic electrical safety standards, avoiding ambiguous rules for host system approvals.

- Simple compliance with Ex ic certification requirements from control room to field
- No need to assess energy contribution of host H1 card
- Architecture supports Ex nA, Ex d devices and Ex i devices on the same segment
- Satisfies FISCO and entity spur applications
- Supports longer trunk cable lengths for FISCO spur applications

937x-FB2 range



NEW

937x-FB3 range

Compact fieldbus barrier system, 12 spur module

The The 9377-FB3-Px Fieldbus Barrier module is a field-mountable wiring hub providing twelve, intrinsically safe, 'simplex', spur connections from a single non-intrinsically safe trunk, for connection to Foundation™ fieldbus H1 fieldbus instruments.








Ex ic adaptor



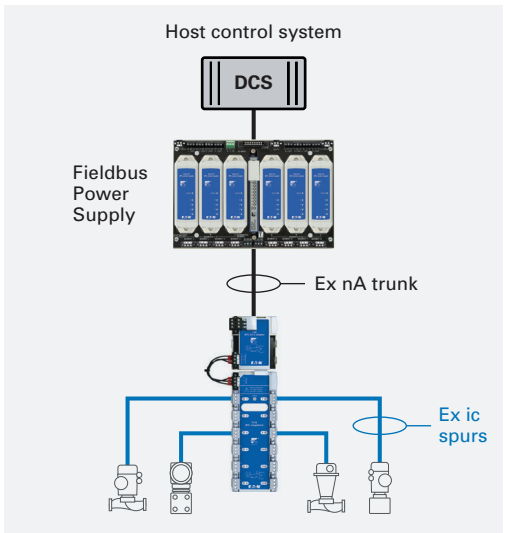

MTL fieldbus power supplies

912x & 910x range



FISCO (Fieldbus Intrinsically Safe Concept) power supplies

Eaton's MTL FISCO power supplies have become established as the industry-standard solution for FOUNDATION™ fieldbus installations in which a fully intrinsically safe field network is required. The key benefits of intrinsic safety in fieldbus applications are the ability to carry out live maintenance on any part of the field wiring, and the elimination of complex mixed-protection techniques in the field junction box.

The introduction of power supply redundancy extends the benefits of FISCO into critical hazardous area applications requiring the highest levels of reliability. Such redundancy is routinely specified by knowledgeable end users and engineering companies for fieldbus installations in which failure could result in consequential damage or severe loss of production.

- Simplex (912x range) and redundant (910x range) options
- Safest possible technique in hazardous areas
- Fully live-workable field network
- Up to 265mA segment current
- Field junction box contains simple, highly reliable megablock wiring hub
- Integrated versions for major host control systems
- Redundant power supply option provides unique combination of high system availability and operator safety

9180-x1 & 9180-x2 range




Redundant fieldbus power supplies

Our new 918x range of fieldbus power supplies are the first in the market to use an "N+1" architecture to provide redundant power for FOUNDATION™ fieldbus networks, reducing the capital cost per segment by up to 25%.

In contrast with conventional redundancy schemes that use power supply modules in a 1:1 arrangement regardless of actual segment loading, the 918x uses two or three modules per segment depending on the maximum demand current. For segments requiring redundant power up to 250mA - representing a significant proportion of segments in typical fieldbus projects - only two modules are required. The addition of a third module provides redundant power at 500mA.

- Unique "N+1" redundancy - can reduce initial capital cost by 25%
- Fully isolated hot-swappable power modules
- Integrated versions for major host control systems
- Reliable, screw secured pluggable field and power feed connections
- Choice of rising cage clamp screw or spring clamp terminals
- Screen pass-through or ground option without accessories
- On-line physical layer diagnostics option
- Pluggable trunk surge protection option

F10x



Single-segment fieldbus power supplies

The F101, F102 and F104 fieldbus power supplies each provide power for a single FOUNDATION™ fieldbus H1 segment.

Galvanic isolation, power conditioning and segment termination are incorporated. The F10x range modules are ideal for all new installations requiring single-segment, non-redundant power in small to medium scale applications such as batch processing.

- Compact design
- Fully isolated
- Low power dissipation
- DIN-rail power bus option
- Low power version for remote, solar-powered applications (F104)

FOUNDATION

Low cost safety in hazardous areas, with high reliability



MTL fieldbus wiring components

F300 range




Megablock wiring hubs

The F300 range represents the latest technology in fieldbus wiring hubs, building on three generations of megablock products with an enviable installed base. Providing a simple and reliable means of connecting individual fieldbus instruments to the field network, megablocks protect against spur short-circuits and allow instruments to be easily added to or removed from the segment without disrupting communications.

- Single-piece trunk in/trunk out connector simplifies installation and maintenance
- Spur short circuit protection
- Removable terminator
- Choice of rising cage clamp screw or spring clamp terminals for spurs
- Unique pluggable trunk and spur surge protection option
- Can be installed in zone 2 or division 2 with connections to Ex nA, Ex ec or Ex ic field instruments

F200-IS range

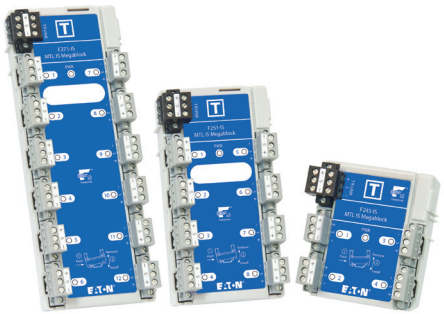


Intrinsically safe megablock wiring hubs

The F200-IS range of megablocks are specifically designed and certified for use in intrinsically safe fieldbus networks. When used with the MTL 912x or 910x range of FISCO power supplies, they allow complete IS segments to be assembled, for connection to field instruments carrying intrinsic safety FISCO certification. 'Entity' certified devices can also be supported using simple adaptors in each spur circuit. As the F200-IS megablocks are part of an intrinsically safe circuit, no special certifications are required for the field enclosure - although Eaton's MTL range of process junction boxes provide excellent environmental protection.

- Certified intrinsically safe for use in FISCO networks
- Compatible with simplex or redundant FISCO power supplies
- Spur short circuit protection
- Choice of rising cage clamp screw or spring clamp terminals for spurs

F200-XE range

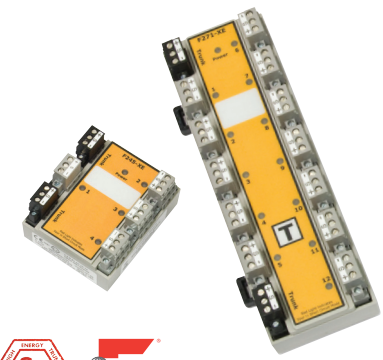

Increased safety megablock wiring hubs

The F200-XE range of megablocks carry certification to the increased safety (Ex e) standard to allow installation in IEC zone 1 hazardous areas.

When mounted inside suitably certified Ex e field enclosures such as Eaton's MTL range of process junction boxes, they avoid the need for heavy and expensive 'flameproof' (Ex d) field enclosures. They are compatible with conventional simplex or redundant fieldbus power supplies as part of 'High Energy Trunk' networks, with spur connections to Ex d certified field instruments.

- Installation in zone 1 hazardous areas in suitably certified Ex e enclosures
- For connection to 'flameproof' (Ex d) field instruments
- Spur short circuit protection
- Choice of rising cage clamp screw or spring clamp terminals for spurs

MTL fieldbus barriers

9372-FB

Redundant fieldbus barrier

Fieldbus barriers are widely adopted in FOUNDATION™ fieldbus networks to connect to intrinsically safe instruments in zone 1 hazardous areas.


With fieldbus barriers the requirement for signal isolation and electronics to provide intrinsically safe protection results in lower system availability compared to segments using a simple device coupler. For applications in industries requiring the highest levels of availability, redundant fieldbus barriers can now be specified.

By duplicating the barrier function in the remote field enclosure, the units will tolerate hardware failures without interrupting the operation of the fieldbus segment. In the event of a fault, notification is provided to the host control system, prompting replacement of the failed hardware and the restoration of full redundancy.

- Unique, patented redundant configuration for super-high system availability
- Complete enclosure systems for up to 12 intrinsically safe spur connections
- Failure alarm direct to host control system via integrated fieldbus device
- Supports full feature set of class-leading 9370-FB range
- Live-pluggable system components, without 'gas free' constraints
- Optional, integrated surge protection for trunk and spurs



Maximum availability for your critical loops

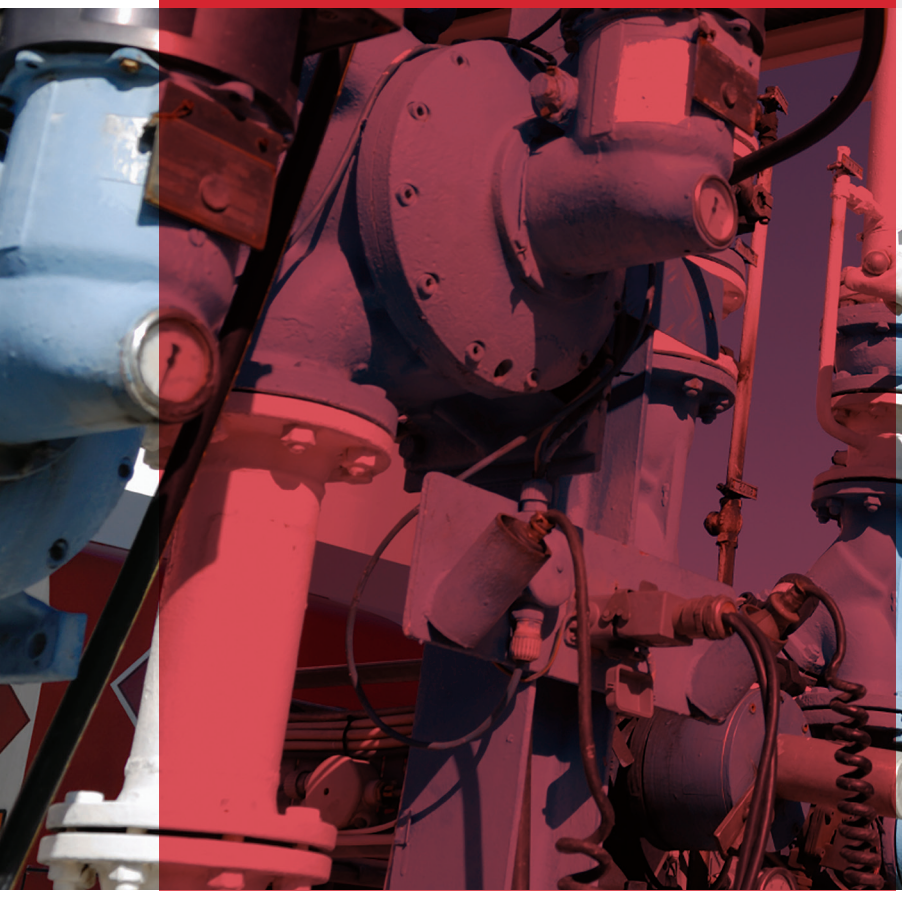



Maintaining high availability of the fieldbus network throughout its lifetime

MTL fieldbus diagnostic tools

F809F-Plus



Diagnostic module

The F809F-Plus fieldbus diagnostics module monitors the performance of up to eight fieldbus segments providing information on network health. During commissioning, the F809F-Plus collects data on the performance of the physical layer, provides alarms if any parameter is outside the preset limits, and stores a baseline segment performance within the Instrument Management Software.

FBT-6



Fieldbus monitor

The fieldbus monitor, FBT-6, is used to examine the operation of a live FOUNDATION™ fieldbus network without interfering with its operation. The FBT-6-PA Profibus PA diagnostic monitor can be used to examine the operation of a live Profibus-PA segment without interfering with its operation. These monitors are intended for maintenance personnel to verify network operation or to troubleshoot an errant network.

MTL fieldbus devices & accessories

BAx range



Fieldbus H1 & Profibus PA displays

Eaton supplies the widest range of fieldbus displays from 8 variable to cost effective single variable versions, field and panel mount variants, safe and hazardous area versions as well as FOUNDATION™ fieldbus H1 and Profibus PA versions. All versions are bus powered to simplify installation.

FCS range



Enclosures

Eaton has access to a complete range of steel and GRP enclosures and is able to supply complete, engineered solutions for megablocks and other field wiring components. Detailed specifications can be met for accessories and internal wiring, minimising the engineering and project management burden. Eaton's Crouse-Hinds series enclosures are internationally respected and often pre-qualified by end users and plant operators.

Surge protection devices



Surge protection

The design and manufacture of surge protection devices has been one of our strengths for many years. They afford the highest level of protection for complete networks, to defend control systems and associated fieldbus instruments from surges entering through the fieldbus trunk or spurs. Many of our MTL fieldbus products are supplied as standard with the ability to accommodate optional surge protectors, with the benefit of reduced engineering and wiring costs.

More detailed MTL fieldbus product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/fieldbus-equipment



MTL industrial network solutions

In today's process industries there are increasing demands for greater efficiency, higher reliability and lower cost of ownership of field equipment and supporting networks. Eaton offers end to end or part solutions to meet the requirements of your project.

Eaton is proud to present its range of MTL industrial-strength networking products.

Designed to meet the most demanding process applications worldwide, our portfolio of ruggedised Ethernet connectivity devices offer harsh and hazardous area classifications, combined with our 40 year pedigree of understanding process industry requirements.

Robust, versatile and reliable connectivity for harsh process control environments

Intrinsically safe Ethernet

For applications requiring access into zone 1 and zone 0 hazardous areas, including wireless access, then look no further than Eaton's MTL intrinsically safe Ethernet range. The MTL IS Ethernet range delivers intrinsically safe "Power over Ethernet" (PoEx™) with a single Cat 5e or Cat 6 cable, allowing live connection and disconnection of the end device in zone 0 or zone 1.

Industrial security system

The move to open standards such as Ethernet, TCP/IP web technologies combined with greater plant integration, has seen a growing number of network security incidents affecting critical infrastructure and manufacturing industries. The MTL Tofino™ industrial security system is a unique solution that addresses the important issue of protecting industrial networks from modern cyber-security attacks.

MTL intrinsically safe Ethernet

NEW

9474-ET(G)/BxLAN

Intrinsically safe Ethernet interface

The unique 9474-ET/ETG interface provides compatible IS signal parameters to allow interconnection to other IS Ethernet devices, simplifying connectivity between non-IS and IS Ethernet devices. The BxLAN is available in versions to suit different applications.

Boxed Types:

- 9474-ET 10/100Mbps Ethernet Interface
- 9474-ETG 10/100/1000Mbps Gigabit Ethernet Interface

OEM PCB Type:

- BxLAN 10/100Mbps Ethernet Interface
- ATEX / IECEx certified
- Compact dimensions
- DIN-rail mounting (cased version)
- Suitable for safe area mounting
- OEM version for incorporating into other designs
- Loop powered
- Ta = -40°C to +70°C



MTL RugiCAM-IP

HD IS Ethernet network camera

Eaton's MTL RugiCAM high definition (HD) IS Ethernet network camera and accessories enable plant managers across process industries worldwide to ensure they are operating safely in hazardous zone 1 and zone 2 areas.

The first of its kind for the hazardous area market, the lightweight MTL RugiCAM camera monitors and provides enhanced visual safety to control and automation systems installed on site, and provides additional security and visibility to specific hazardous locations in plants so safe operation can be maintained. Connecting directly to compatible IS Ethernet systems up to 100 metres via a Cat5e cable or WiFi, allows for quick and easy maintenance, enabling plants to save time and associated costs.

- Rugged case with 6mm toughened glass for harsh environments
- IS approval allows for safe, live network maintenance
- HD resolution of 1080p and enhanced image analysis
- Supports live video streaming via a H.264 compressed video format and motion JPEG with user-selectable frame rates
- Micro-SD card slot that can be used as an optional back-up
- Available with an optional Infra-Red (IR) or white LED lights unit that enhances the camera's low light capabilities



MTL intrinsically safe Ethernet

9478-ET(G)



PoEx

Isolator

The 9478-ET(G) is an Intrinsically Safe (IS) Ethernet Isolator suitable for Safe Area or Zone 2 / Zone 22 mounting for connection to intrinsically safe certified devices mounted in a Zone 0 location. The IS Ethernet isolator allows the interconnection of a Zone 2 or uncertified safe area device to the intrinsically safe 9400-ET range of Ethernet networking products,operating in the hazardous area. The isolating barrier provides a compact alternative solution to fibre optic cable and media converters and for when it is desirable to use Cat5e/6 cables in preference to fibre.

- Intrinsically Safe ATEX / UKEX / IECEx Certification / North America (METC/US) approval
- Galvanically Isolated Safe and Hazardous Area Ports
- Dual Port Switch 10/100/1000Mbs LAN (daisy-chain capability)
- Single IS Ethernet Switch Port 10/100/1000Mbs* LAN
- Safe and Hazardous sides link independently with auto-negotiation
- Status LEDs
- Single 12V/24VDC (10-30V) supply
- Compact dimensions (W: 42 x H: 160 x D: 140 mm)
- [Ex ia Ga] IIB, [Ex ia Da] IIIC (non-mining), [Ex ia Ma] I (M1 mining).
- Ta = -40ºC to +70ºC
- Safe Area or Zone 2 / Zone 22 mounting

9479-ETG-CSL



PoEx

Wireless access unit

The 9479-ET-CSL is an Intrinsically Safe (IS) WLAN AP/Bridge Module suitable for Zone 1 / Zone 21 mounting, (Zone 0 / Zone 20 with a suitable Ex ia Power Supply). It may be configured as either an AP or Client/Bridge. Also supporting either 2.4GHz or 5GHz operation further extends its range of applications. There are 2x RJ45 (LAN) ports that support 10/100/1000 IS Ethernet connections – these can allow 'daisy-chaining' of units together. Power (12V DC) is supplied to the module either locally or using Power over Ethernet (PoEx) from the LAN port - This requires the PoEx output to be wired to the Supply Input terminals by the user.

Note: PoEx not available on Gigabit versions

- Intrinsically Safe ATEX / UKEX / IECEx / North America (METC/US) approvals
- Dual Band 2.4GHz / 5GHz WLAN Support
- Access Point (AP) Mode
- or Client/Bridge Mode
- Dual Port Switch 10/100/1000Mbs LAN (daisy-chain capability)
- Compact dimensions (W: 42 x H: 160 x D: 140 mm)
- Ex ia IIB T4 Ga, Ex ia [ia Da] IIIC T135º Db (non-mining), Ex ia I Ma (M1 mining).
- Ta = -40ºC to +70ºC
- Zone 1 / Zone 21 mounting (Zone 0 / Zone 20 with a suitable Ex ia Power Supply)

Safe, live-workable connections into zone 1

9475-ET(G)



PoEx

Media converter

The 9475-ET(G) is an Intrinsically Safe (IS) Dual Port Media Converter Module suitable for Zone 1 / Zone 21 mounting, (Zone 0 / Zone 20 with a suitable Ex ia Power Supply). The use of 1310nm optics (instead of 850nm) allows a longer fibre-optic link length, typically 10Km at (Gigabit) 1000Mbps using Single Mode fibre or 500m when using multi-mode fibre. There are 2x RJ45 (LAN) ports that support 10/100/1000 IS Ethernet connections – these can allow 'daisy-chaining' of units together. Power (12V DC) is supplied to the module either locally or using Power over Ethernet (PoEx) from either LAN port - This requires the PoEx output to be wired to the Supply Input terminals by the user (9475 used as a Powered Device). Alternatively PoEx can provide power to another device connected to the LAN port (Power Source) by connecting power into the PoEx terminals to feed the LAN device (9475 used as a Power Source).

- Intrinsically Safe ATEX / UKEX / IECEx Certification / North America (METC/US) approvals
- Dual 1310nm Fibre-Optic Ports (10Km)
- CPU Management Feature
- Dual Port Switch 10/100/1000Mbps LAN (daisy-chain capability)
- Fibre-Optic Repeater Mode with 2 Local LAN Ports
- Compact dimensions (W: 42 x H: 160 x D: 140 mm)
- Ex ia op is IIB T4 Ga, [Ex ia Da] IIIC (non-mining), Ex ia op is I Ma (M1 mining).
- Ta = -40ºC to +70ºC
- Zone 1 / Zone 21 mounting (Zone 0 / Zone 20 with a suitable Ex ia Power Supply)

9476-ET(G)



PoEx

Switch module

The 9476-ET(G) is an Intrinsically Safe (IS) 6-Port Managed Ethernet Switch suitable for Zone 1 / Zone 21 mounting, (Zone 0 / Zone 20 with a suitable Ex ia Power Supply). The 6x RJ45 (LAN) ports support 10/100/1000 IS Ethernet connections. Available in 6 Port Gigabit and also Mixed Gigabit and 10/100 + PoEx versions to suit various applications. Power (12V DC) is supplied to the module locally along with Power over Ethernet (PoEx) for the connected devices where required. Note: PoEx not available on Gigabit ports

- Intrinsically Safe ATEX / UKEX / IECEx Certification / North America (METC/US) approvals
- 6 Port Switch 10/100/1000Mbps LAN
- 6x Gigabit Ports or Mixed Gigabit and 10/100 PoEx Versions
- CPU Management Feature
- Compact dimensions (W: 42 x H: 160 x D: 140 mm)
- Ex ia IIB T4 Ga, [Ex ia Da] IIIC (non-mining), Ex ia I Ma (M1 mining).
- Ta = -40ºC to +70ºC
- Zone 1 / Zone 21 mounting (Zone 0 / Zone 20 with a suitable Ex ia Power Supply)

MTL intrinsically safe power supplies

949x-PS-Plus



PoEx

IS isolated power supplies

The 949x-PS-Plus range of MTL intrinsically safe (IS) isolated power supplies are ideal for providing power to instrumentation in hazardous process areas. They offer a wide range of different IS output voltages, ranging from 4.8V - 17.7V, offering flexibility of options to best suit a variety of applications. The 949x-PS-Plus range can also be used with the 946x-ET range of MTL IS Ethernet devices to provide direct power or IS Power over Ethernet (PoEx™), a method which allows a single cable to provide both the data connection and electrical power to devices, in turn, reducing installation costs.

- Wide range of output voltages 4.8V - 17.7V
- Suitable for connections in Gas Group IIB or Gas Group IIC hazardous areas
- Wide operating temperature range of -40˚C to +70˚C
- Zone 2 mountable
- DIN-rail or backplane mounting
- ATEX / IECEx certified



MTL network security

Supervisory Control and Data Acquisition (SCADA) and industrial control systems have long been considered immune to the cyber attacks suffered by corporate information systems.

The move to open standards such as Ethernet TCP/IP and web technologies has seen control systems affected by a growing number of both malicious and non-malicious network security events impacting critical infrastructure and manufacturing industries.

The MTL Tofino™ industrial security system is a unique solution that addresses the important issue of protecting industrial networks from modern cyber-security attacks.

Protecting industrial networks from cyber-security threats



More detailed MTL network security product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/industrial-network-security

Featured product

MTL industrial security

MTL Gigabit Tofino™ Ethernet-based industrial security appliance

Protect your control system against network problems and cyber threats.

You may never be attacked by a serious hacker, but typical control networks are extremely vulnerable to day-to-day security and reliability issues. Poor network segmentation, unprotected points of entry, 'soft' targets such as unpatched PCs and vulnerable PLCs, and human error can result in significant production losses and even safety issues.

The next generation MTL 4-port Gigabit Tofino security solution, continues to provide the highest level of network protection for process automation applications—while significantly expanding capability to meet the demands of modern, data-intensive OT environments.


Designed for critical infrastructure and Industry 4.0 applications, the solution combines stateful firewall protection, deep packet inspection (DPI), and intrusion detection and prevention (IDS/IPS) within a single, compact industrial appliance.

This enables advanced, multi-layered cyber defence that not only controls network traffic, but also detects and blocks sophisticated threats before they can impact operations.
The MTL Tofino solution remains a distributed security system with a flexible architecture, allowing you to create security zones throughout your control network to protect critical system components. It supports a wide range of industrial protocols through deep packet inspection for protocols such as Modbus, OPC, EtherNet/IP and others, providing granular visibility and control of industrial communications.

- 4 x Gigabit Ethernet ports for high-performance industrial networking
- Robust industrial design with DIN-rail mounting and hazardous area approvals
- Wide operating temperature range (-40°C to +70°C) for harsh environments
- Next-generation industrial firewall platform with advanced OT cybersecurity capabilities
- Stateful packet inspection, deep packet inspection (DPI), and IDS/IPS for layered threat protection
- Support for major industrial protocols (e.g. Modbus, OPC, EtherNet/IP) with deep inspection
- Secure remote connectivity with support for IPsec, OpenVPN and other VPN technologies
- High availability and redundancy capabilities to maintain continuous operation
- Centralised and cloud-based firewall management for simplified configuration and scaling



Zones and conduits provide defence in depth

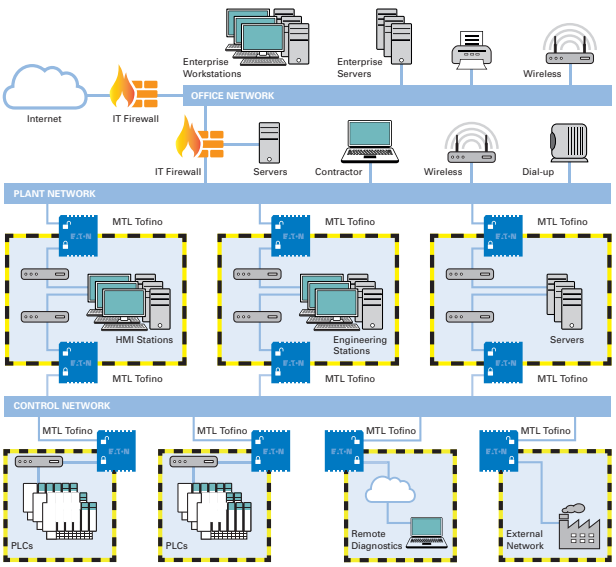

MTL surge protection solutions

Eaton supplies a comprehensive range of MTL surge protection devices offering solutions for mains power, process control, network and communications, telecom, wireless and RF systems.

Correctly applied, surge protection can reduce equipment failure and increase plant availability, thus allowing the maintenance team to perform a more proactive role. Direct cost savings are achieved through the reduction in premature failures and elimination of catastrophic failures resulting in plant downtime.

Our commitment to not only meet, but surpass our customers' high expectations can only be achieved by maintaining very high standards in all aspects of our business. Independent verification of our quality and safety procedures is of paramount importance and our accreditation to internationally recognised standards such as ISO 9001 is proof of this commitment.

Our 10 year 'no-fuss' product warranty, is even further evidence of our confidence in our products and their application capabilities.

Over 50 years experience in protecting critical operations worldwide

10 YEAR NO FUSS WARRANTY



Featuredproduct

MTL data and signal surge protection

MTL SD Modular (SDM) range

Modular surge device for I/O loops

Based on the proven reliability of the well established MTL SD range, the MTL SD Modular (SDM) surge device brings additional features designed to reduce cost, optimise productivity and increase plant safety.

The MTL SD Modular has a compact 7mm footprint, enabling high packing density and reduced cabinet space, whilst providing a powerful 20kA market leading level of protection. Its modular design allows easy maintenance with on-board LED diagnostics prompting operators when replacement of a module is required. This change can be achieved quickly without the use of tools or need to disconnect the device.

The 'make before break' feature ensures no interruption to the signal current during the removal of the module. The MTL SD Modular is backwards compatible with the popular MTL SD range to make upgrading easy.

Available in 7v, 16v, 32v and 55v variants with a current capacity of 700mA, the MTL SD Modular represents a significant step forward in surge protection suited to a wide variety of process control applications.

- Slim, modular, space-saving design
- High-performing 20kA level of protection
- LED for quick fault diagnostics
- Proven multi-stage hybrid functionality
- Make before break for signal continuity
- Fuse disconnect options for ease of test and commissioning
- Voltage ratings to suit process I/O applications
- ATEX certified, IECEx approval and suitable for use in SIL3 loops
- 10 year no-fuss warranty



Surge protection for your valuable instrumentation and control systems

MTL data and signal surge protection

MTL data surge tester



Test analyser for data communication surge protectors

The MTL data surge tester is a versatile and compact, bench-top test device designed to give performance status of data communication surge protectors. This portable, rugged tester makes continuity and current leakage tests of data surge devices quick and easy during routine maintenance, with LED's illuminating to indicate surge module health. This in turn allows users to quickly determine whether the surge protection device has failed or degraded in performance to an unacceptable level. These tests validate the integrity of the surge protection system, thus ensuring safety and a continuous high-level of protection.

MTL fieldbus surge protection

FP32 range



Din-rail mounted surge protection for fieldbus systems

FP32 devices provide surge protection, along the trunk or spurs of fieldbus systems, from damaging the associated electronics such as terminators, spur blocks and the bus control equipment. Fully automatic, the FP32 reacts immediately to ensure that equipment is never exposed to damaging surges by directing surges safely to earth and then reseting automatically.

- Meets the requirements of IEC61158-2:2000 for FOUNDATION™ fieldbus
- Plug connectors for quick and easy connection or rewiring
- 20kA maximum surge current
- FM, CSA, FISCO and ATEX approved
- Lloyds approval

Other MTL surge protection products



Data and signal surge protection

Induced surges and transient voltages can destroy or, perhaps more worryingly, render inaccurate sensitive control and measurement instruments. Control systems, sensors and telecommunications equipment may be subjected to a barrage of interference and surges of energy, therefore to disregard the need for simple, effective and reliable surge protection is to compromise the safety of the plant. Eaton's MTL surge protection devices provide protection both at the controller and at the field-mounted instrument, with specifically designed devices suitable for all data and signal requirements.



Power surge protection

Surges and spikes from nearby lightning strikes, arc-welders and high voltage cables can destroy or disrupt unprotected electronic equipment. These destructive forces enter mains power circuits within buildings by a variety of methods. The primary route is where power, often "dirty" and spike-laden, actually enters the building and it is at this point that surges should be stopped in order to prevent them from propagating further. However, surges and RFI can also corrupt mains power supplies from within the building. By providing protection at the main power distribution board and then at each piece of equipment, mains-borne surges and spikes are eliminated before they can cause damage.

LS Range



LED Light surge protection

LS range is a compact SPD for LED lighting systems. Available in 277V,347V and 480V with a current rating of 5A for series version and unlimited for parallel version. The LS05K, LS10N and LS20N range is UL1449, 4th edition recognized component and selected models meet the "Enhanced" requirement of ANSI C136.2. LS range is compatible with IEC class I and class II luminaries.

- 10kA - 20kA surge protection per mode
- IP66 protection for outdoor application
- Models for both series and parallel connection.
- Selected models complies to the requirements of IEC61643-11 for T2+T3.

FS32 range



Surge protection for fieldbus components

The FS32 surge protection device prevents surges and transient over-voltages conducted along the trunk or spurs of fieldbus systems from damaging the associated electronics such as terminators, spur blocks and the bus control equipment. In operation the FS32 does not adversely affect the performance or operation of the fieldbus or connected equipment, and allows signals to pass with little attenuation.

- Protects IS spurs on MTL 937x-FB range of fieldbus barriers
- 20kA maximum surge current per line
- Plug connectors for quick and easy connection or rewiring
- Meets the requirements of IEC61158-2:2004
- Can be used on MTL megablocks or other fieldbus equipment

TP32 & TP48 ranges



Fieldbus specific surge protector

The TP32 is specifically designed to protect process transmitters and devices on fieldbus systems, meeting the requirements of IEC61158-2:2000 and ANSI/ISA-50.02-2 1992. The TP32 is a hybrid design consisting of high-power, solid state electronics and a gas discharge tube which is capable of diverting surges up to 10kA.

Surge protection for field transmitters

The TP48 safeguards field-mounted process transmitters where it matters, right at the unit. Easy to install and providing high-level protection against surges and transients whilst normal operation remains unaffected. The TP48 resets itself automatically after each operation. The TP48 is available with screw threads to suit different transmitters, with explosion proof and intrinsically safe options for hazardous areas. Working voltage is 48V DC maximum with impulse ratings of 10kA peak current and 10kV peak voltage.

MA15 range



AC and DC power surge suppressor and filter

The MA15 and MA15E range was designed to protect electronic equipment and computer networks against the effects of 'noise pollution' induced in power supplies. These units clean up the effects of industrial noise and surges caused by lightning, switching devices, thyristor controls, transmission system overloads and power-factor correction circuits. MA15 range is UL1449, 4th edition recognised components (certified by UL for both US and Canadian requirements), and MA15E range for ATEX and IECEx approval for mounting in Zone 2 hazardous area ,typically inside remote I/O cabinets. Both the ranges exceeds the requirements of IEC 61000-4-5.

- Protects panel loads up to 15 amps in series, unlimited amps in parallel
- Suitable for AC or DC applications
- Thermal and short circuit protection



Network and comms surge protection

Network technologies from the internet to LANs have revolutionised the way businesses operate. From traffic control and sensing to the real-time status of a remote pumping station, industry relies on computer networks now more than ever. Network surge protection is essential if your business relies on IT services for its minute-to-minute operation. Eaton provides a complete line of ruggedised MTL network surge protection devices, including our ZoneBarrier high energy Ethernet range for 1000/100/10-Base-T applications, to protect the sensitive equipment in these harsh environments.



Specialist surge protection

With a wealth of experience in the design and manufacture of surge protection solutions for very specialised areas of application, Eaton can supply a range of superior MTL protection devices to meet your requirements, for wireless telecommunications, satellite, CCTV or general antenna protection. It is not just the obvious areas, such as mains power, networks and telecom systems that require protection - these specialist applications should not be overlooked.



Telecomms surge protection

Highly integrated, small signal telecommunications equipment is becoming increasingly sensitive to damage and disruption from voltage surges and spikes. It makes sense to protect expensive telephone installations from damage and commercially damaging downtime by fitting effective and unobtrusive protection wherever surges could enter the system. We can supply that protection, whether for private wire or public switched telephone network (PSTN) requirements and with a range of mounting and enclosure types to suit all applications.



MTL HMI and visualisation

All industries require and rely on data to control and monitor the processes in their applications. Human-Machine Interfaces (HMI) provide the process and safety relevant information to the operator where needed in the field. Due to the nature of either harsh and hazardous environments or strict hygienic production environments these applications require specialized equipment with specific characteristics to ensure safe and reliable operation.

MTL GECMA solutions provides industrial operations with cutting-edge operator terminals and HMIs, featuring a flexible modular concept with safe components, high-quality materials, and individually certified modules within slim, modular housing, ensuring uninterrupted performance even in the harshest and most hazardous and hygienic environments.

The MTL GECMA Workstation range is tailored to provide the intended data from the Distributed Control System (DCS), Manufacturing Execution System (MES) and Scada or Overall Equipment Effectiveness (OEE) applications. The operator has access to the systems at the places in the field where the data is required to ensure a safe and continuous operation.

The MTL GECMA Workstation are, depending on product range, suitable hazardous area mounting in Zone 1/21, Zone 2/22 and non-hazardous areas.

With a globally installed base, a vast experience in different applications and a broad range of industries we strive to provide the best-in-class user experience with a reliable and safe product range.

Discover the MTL GECMA Zone 2/22 HMI

Welcome to the world of cutting-edge technology designed to enhance your operations in GMP compliant production facilities. Introducing the MTL GECMA Zone 2/22 HMI (Human Machine Interface), a powerful and robust solution specifically engineered to meet the demands of Zone 2/22 areas



Unleashing the Power of Zone 2/22 HMI:

Built in Security: The inclusion of Eaton's Cybersecurity Guideline provides an excellent starting level of protection against unauthorized access to the hardware and software. This protection can subsequently be extended and adapted to suit local requirements by the system administrator.

Safety: GECMA Zone 2/22 HMI is designed to operate reliably and safely in hazardous locations. It adheres to global industry standards and certifications, ensuring compliance with safety regulations and offering peace of mind for your operations.

Enhanced Visualization: Featuring a high-resolution display, GECMA Zone 2/22 HMI provides operators with exceptional visibility in all lighting conditions. The intuitive projective capacitive multitouch screen interface enables seamless interaction and easy access to critical information, empowering operators to make informed decisions quickly.

Rugged Durability: Built to withstand demanding environments, the GECMA Zone 2/22 HMI is engineered with robust materials and components. Designed to prevent the accumulation of fluids and easy cleaning it is resistant to dust, water, temperature variations, and cleaning agents, making it ideal for pharmaceutical, chemical and petrochemical facilities, and other industrial settings where reliability is paramount.

Flexibility and Scalability: The GECMA Zone 2/22 HMI offers a wide range of connectivity options, allowing seamless integration with various industrial control systems. With its modular design, you can expand its capabilities to meet your evolving operational needs, ensuring a future-proof investment.

Advanced Functionality: Experience advanced features that optimize productivity and efficiency. The MTL GECMA Zone 2/22 HMI supports multi-touch gestures, multi-language interfaces, and supports numerous protocols.

Applications:

The GECMA Zone 2/22 HMI is an ideal solution for a wide range of applications, including:

Chemical Processing: Enhance control and monitoring in hazardous chemical manufacturing facilities.

Wastewater Treatment: Optimize control and monitoring in hazardous wastewater treatment plants.

Power Generation: Enable efficient control and monitoring in power plants, including gas turbines, generators, and more.



Oil and Gas Industry: Improve safety and streamline operations on refineries, and processing plants.

Pharmaceutical Manufacturing: Ensure compliance and enhance productivity in pharmaceutical production areas.

Featuredproduct

MTL GECMA Work Station Zone 1 Remote Terminals

Reducing your plant costs
Optimising your productivity
Increasing your plant safety

MTL GECMA Work Station

What's critical to you, is critical to us.

The MTL GECMA Work Station range has been designed to address the environmental challenges of providing the means to visualize and control a system or application within harsh and hazardous areas. Building upon decades of experience and expertise

and the significantly large installed base globally, the MTL GECMA Work Station is packed full of features and state-of-the-art technology. The range includes Remote Terminal (RT), Thin Client (TC) and Personal Computer (PC) to meet a wide variety of applications. Suitable for the strictest of hygienic conditions and aggressive production environments, its slim, flexible modular construction also includes individually certified modules to allow safe maintenance even in hazardous areas.



MTL GECMA RT


Remote Terminal (RT)

Eaton's MTL GECMA RT is a keyboard, video and mouse (KVM) extension of either a safe area Personal Computer or Thin Client and can be installed into Ex zone 1/21 hazardous areas.

Providing a user-friendly, near real-time solution that enables a safe area PC or Thin Client to be remotely controlled from the hazardous area, via a single, point-to-point connection.

It comprises of the individually Ex certified components from our innovative, modular MTL GECMA Work Station range, with the addition of a Remote Terminal (RT) communication module and Safe Area Unit (SAU), delivering a wealth of great features and values specifically for your application.

MTL GECMA RT operating principle **Standard**

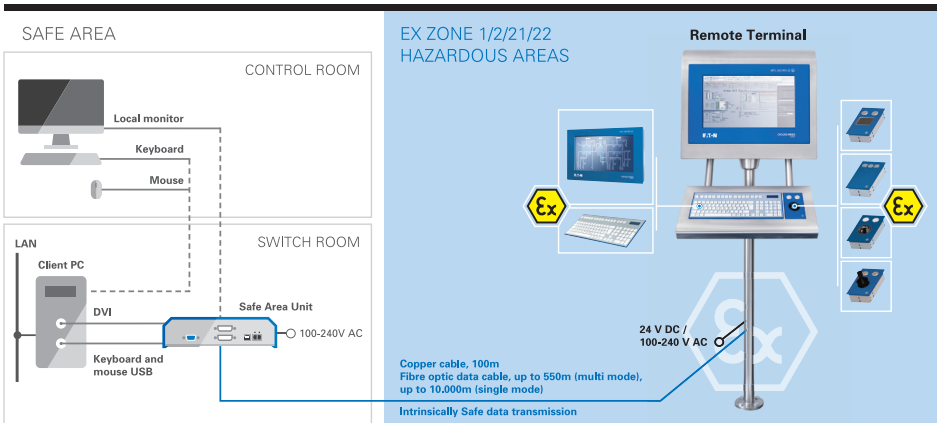


Thin Client (TC)

Eaton's MTL GECMA TC is specifically designed for virtualisation applications in Ex zones 1/21 hazardous areas.


It provides a powerful and reliable 'client' solution for integration into a Distributed Control System. Incorporating a Quad Core 2GHz CPU, 4GB or 8GB RAM, numerous Ex i and Ex e connections and with a standard 'Windows-based' Windows-based operating system. A dual Ethernet port provides redundancy on the network connection increasing client's network availability.

The MTL GECMA TC comprises of the individually Ex certified components from our innovative, modular MTL GECMA Work Station range. The simple addition of a TC communication (COM) module is then added to deliver a Thin Client solution and available with a copper or fibre (Multi Mode or Single Mode) connection for a reliable transfer of data across longer distances.

MTL GECMA TC operating principle **Standard**

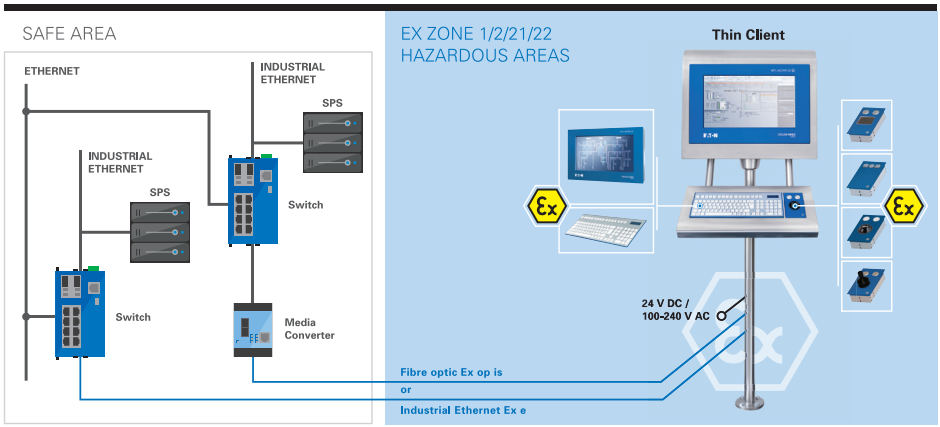

Innovative human-machine interfaces for on-site operation and local visualisation

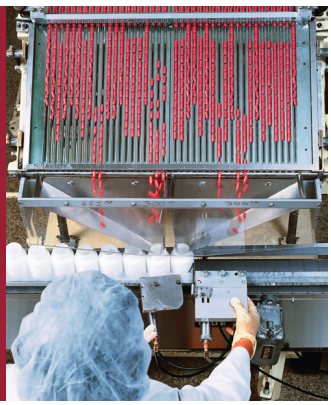




Personal Computer (PC)

Eaton's MTL GECMA PC provides a powerful, flexible, stand-alone solution and is specified for use in Ex zone 1/21 hazardous areas.

Comprising of the individually Ex certified components from our modular MTL GECMA Work Station, with the addition of a PC communication (COM) module and available with a copper or fibre (Multi Mode or Single Mode) connection for a reliable transfer of data across longer distances.

Numerous Ex i and Ex e connections are available, allowing easy integration of locally connected devices such as barcode scanners and card readers. A dual Ethernet port provides redundancy on the network connection increasing client's network availability.

MTL GECMA PC operating principle **Standard**

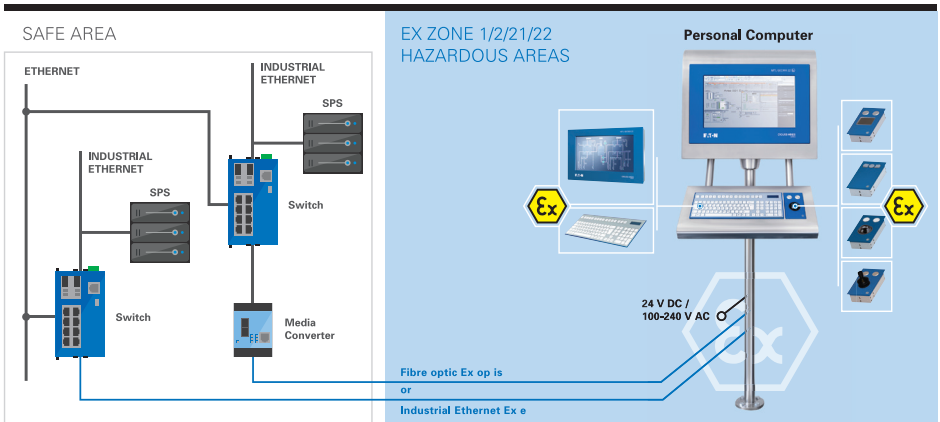

MTL enclosures and accessories for our MTL GECMA HMI range

Standard enclosures/mountings

Our housing solutions are designed to meet strict hygienic requirements to prevent the accumulation of dust and liquids. The stainless steel is polished to provide a surface roughness of <=0.8µm and can be cleaned thoroughly due to the IP66 rating. The keyboard inclination and the overall standard height of the terminal provide an excellent ergonomic solution.

The MTL GECMA WS uses a rear door housing with (RDP) or without keyboard housing (RD) as a standard product offering across all screen sizes. Our mounting components, such as the pedestal (STF) and elbow (EBF), together with the MB coupling provide an universal method for simple, fast and secure installation.

- Hygienic, ergonomic field desk enclosure
- Designed to accommodate the display, keyboard, mouse or trackball
- Keyboard inclined by 30°
- Protection system IP 66
- Stainless Steel 1.4301 (1.4404/316L opt.)
- Polished to 240 granulation (or better on request)
















Custom enclosures

The MTL GECMA WS modular concept enables application in a wide variety of special and customised housings. Our in-house engineering department will assist customers in achieving the optimum housing solution to suit their particular working environment, e.g. limited space, integration of various control elements, special resistant housing surfaces, integration into wall, cabinets and current housings.

Our extensive knowledge of HMIs in hazardous areas allows us to optimise the design to best suit the customer's application in hazardous, clean room and any particular demanding environment.

Accessories

A comprehensive range of accessories and options are available for the MTL GECMA WS range that can support and optimise customer's individual processes and plant requirements.

Whether you have a requirement to interface to the IT world outside of the hazardous area by wireless communication, ensure access control, select the optimum ergonomic input device and display option for your demanding environment, enable easy hardware based file transfer, or interface external input devices like barcode scanners, Eaton's original MTL accessories and options are approved in various hazardous areas.

Intrinsically Safe Tablet PC

Intrinsically Safe Tablet PC for Zone 1/21



The MTL GECMA IS 10.1" Tablet delivers powerful, fully mobile computing directly into hazardous areas, enabling safer and more efficient work at the point of operation. Purpose-built for explosive atmospheres, it combines intrinsic safety with industrial-grade performance, allowing users to access real-time data, applications and digital tools exactly where decisions and actions are taken without compromising compliance or reliability.

Designed to support modern, connected workflows, the GECMA IS tablet helps operators, maintenance teams and engineers reduce errors, minimise downtime and improve operational visibility by working closer to assets.

With a familiar Windows-based environment and seamless integration into existing systems, it supports a wide range of applications including maintenance, inspection, commissioning and asset management. As part of Eaton's trusted MTL GECMA HMI and visualisation portfolio, it is ideally suited for demanding industries such as oil & gas, chemicals, energy and manufacturing, helping organisations safely unlock the full value of digitalisation in hazardous environments.

- Lightweight design
- Large 10.1" display for optimum information display
- High-capacity battery
- Excellent Interconnectivity through WiFi, LTE, - Bluetooth and NFC
- Front & Rear Camera or optional without camera
- Designed for best performance and reliability in harsh & hazardous environments

What's critical to you, is critical to us.

More detailed MTL HMI and visualisation product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/Industrial-PC-Thinclients-&-workstations



MTL process alarm equipment

As a global supplier Eaton provides MTL alarm products for both safe and hazardous environments.
Our alarm annunciators capture and display critical alarms with options to timestamp to 1mS resolution and transmit this data to third party devices over various protocols. Sequential events can also be recorded within substation automation systems by using the MTL substation annunciator that utilises various protocols such as IEC61850 and DNP3.0.
Eaton's MTL network annunciator uses the same protocols to display critical alarms as an intelligent lamp unit with features such as:

Alarm solutions to the worldwide process and power industries

- Integral dual redundant PSU's
- Alarm events can be transmitted over IEC61850 and DNP3 protocols
- IEC61850 & DNP3.0 protocols can drive MTL annunciators for critical alarms
- SNPT synchronisation
- For safety instrumented systems also offer the SIL725, a unit that is certified to IEC61508



Featured products

MTL annunciators

More detailed MTL process alarm product information in separate, comprehensive catalogues or datasheets are available from your local Eaton office, or via our website at eaton.com/process-alarm-equipment

RTK SmartAlarm annunciator

Alarm annunciators

Eaton are pleased to announce an alarm annunciator family in the popular DIN package size. The RTK SmartAlarm brings together many years of development in alarm annunciator technology and builds on the functionality of the field proven RTK UC625. The RTK SmartAlarm is designed as a complete alarm system with integral, audible, relays and pushbuttons for the most cost effective solution for monitoring critical process alarms. Incorporating ISA 18-1 1979 (R1992) alarm sequence programmable via the front panel mounted USB connector, the unit also accommodates optional signal duplicating relays, dual horn relays and LED display, making the RTK SmartAlarm an ideal choice where full functionality is required and space is a premium.

- DIN size module with 8, 16, 24, 32 channel versions
- Internal FCV 24VDC
- Pluggable LED's in five colours, red, yellow, white, blue and green
- Internal logic PSU
- Remote pushbuttons mapped to P/B function



MTL annunciators and event recorders



Used to monitor critical alarms our MTL alarm annunciators are all designed as modular products, manufactured to your exact needs with a range of options added as required.

The range includes products for all hazardous areas and also the RTK SIL725 annunciator certified to IEC61508 at SIL2 level for use as part of a safety instrumented system.

Units can be supplied as pure event recorders to time-stamp events to 1ms or as a combined event recorder/alarm annunciator.

MTL hazardous area notification



Operators working within a hazardous area need to be quickly and clearly informed of any potential hazard, Eaton's MTL. Eaton's PEX7250 Exd hazardous area annunciator is designed to work in all zones, allowing operators to visualize critical alarms locally.

External hazardous area sounders can be provided with programmable tones and outputs in excess of 100dB to aid notification of critical alarm activation

MTL engineered solutions



Many clients require more than the simple supply of loose products. Our experienced team of engineers can provide a consultancy service to help these clients select the most appropriate solution. These solutions can consist of any intrinsically safe or explosion proof system or a custom alarm or event recording system. Our team will manage each project throughout its life-cycle from design, through client approval to production where the complete system, including any software, is fabricated and wired. The finished package, with all agreed documentation, is then ready for the Factory Acceptance Test prior to shipment to site. Commissioning and training can also be provided if required.



Functional Safety Management

Many Eaton MTL products are certified as safe for use in hazardous areas, where explosive material may be present. The products are designed and certified to show that they are incapable of igniting the gas or dust and causing fire or explosion.

Another type of safety is called Functional Safety, which applies when products are used in safety and protection systems, in which a failure may mean that a protective system will not operate as it should. Our MTL product range has been used in safety systems for some time, but there are increasing requirements to demonstrate an adequate level of functional safety, especially after the Buncefield, Texas City and Deepwater Horizon accidents. More and more, customers are demanding that products they use in safety systems meet the requirements of the second edition of the IEC 61508 Functional Safety standard, and they require evidence to show that they do. This is to enable the use of our products within instrumentation loops that are designed to achieve a specific Safety Integrity Level (SIL).

When we design a product in the expectation that it will be used in functional safety-related systems, both the design process and the product needs to comply with IEC 61508:2010.


Eaton has chosen to obtain Functional Safety Management (FSM) certification for the Eaton Electric facility in Luton, UK. FSM means that we have the necessary processes and competence to design products according to IEC 61508:2010. Certification means that a notified body is ensuring that our processes are correct and that we are working to them. Together, FSM certification gives our customers confidence in the company and the use of our products for functional safety.

FSM product range

Eaton continues to expand its Functional Safety offering with a range of MTL products already assessed as suitable for use in or with safety loops. These include:

MTL intrinsically safe interfaces

MTL4500 and MTL5500 ranges of intrinsically safe isolators.



MTL signal surge protection

TPxx range (field mounted) and Sxx range (DIN-rail mounted) surge protection.



MTL asset management instrumentation

MTL4850 HART® SIL 3 multiplexer for use with safety systems.



MTL alarm annunciator equipment

RTK SIL725 safety annunciator.



We were the first supplier of process instrumentation to be certified as a Functional Safety Management (FSM) company

Certificate No. CASS 00015/01

MTL product stewardship

We believe that we owe it to future generations to leave the world a little greener, and that the power to make that happen is in our hands.

We are working towards operating more efficiently and sustainably, and we're helping our customers do the same.

With a clear environmental management strategy, we take responsibility for minimising our product's environmental impact throughout all stages of its life cycle, including end-of-life management.



We commit to minimise the impact of our operations and products on the environment

We make a healthy planet work

Life Cycle Assessment (LCA)

Being responsible for the environment is part of the product design process at Eaton. The principles of Life Cycle Assessment (LCA) are followed to gather information about the potential environmental impact of new MTL products throughout their lifecycle, taking into account energy efficiency, resource efficiency, recycling and compliance with regulations.



REACH

This regulation applies to all electrical products and aims to reduce the use of hazardous chemicals in manufacturing. We are constantly monitoring the use of substances that fall under the REACH regulations in our manufacturing processes. To the best of our knowledge, our products do not contain SVHCs (Substances of Very High Concern) and if those substances are ever discovered above the threshold limit we will communicate it to our customers as required.

ISO, RoHS and WEEE

Eaton manufacturing facilities voluntarily follow the international standards outlined by ISO 9001 and are ISO 14001 compliant with Environmental Management standards. This ensures quality, environmental friendliness, safety, reliability, efficiency and interchangeability – and at an economical cost.

Eaton is also compliant, where applicable, to RoHS and WEEE. The Restriction of Hazardous Substances (RoHS) and Waste Electrical and Electronic Equipment (WEEE) initiatives were designed to limit the presence of hazardous chemicals in landfills and regulate the use of certain materials.



Making compliance information easy to find

Many multi-national organisation now have a policy of "Buy anywhere and use everywhere", and need evidence that the products they buy meet the relevant environmental laws in the intended country of use. Environmental compliance information for MTL products is therefore available in the downloads section of the MTL products website, making it easy for our customers to find the compliance status at the point of ordering.



MTL services and support

Providing instant value to your project with services tailored to your needs

With our years of experience in intrinsic safety, functional safety and FOUNDATION™ fieldbus, our team can provide instant value to your project - at any time in its lifecycle from Front End Engineering Design (FEED) to construction and commissioning right through to post-project network integrity maintenance.

Getting it right from the start is the key to the success of any project and we are here to help you select the right solution for your applications. Regardless of whether you are designing a "traditional" analogue system, HART® based system or a complete digital system incorporating FOUNDATION™ fieldbus, industrial Ethernet or wireless, Eaton can assist with project definition, network services and knowledge capture.

With our global network of sales associates, help is never far away. Our local professional sales teams continue to be your interface to the complete organisation, helping you get your project completed on budget and on time, with real and sustainable benefits.

Learn with Eaton

Why educate?

Education is essential in today's workplace to…

- Replace skills and experience lost through retirement and workforce reduction
- Reduce reliance on costly external expertise and consultancy
- Enable multi-skilling of employees
- Promote continuous vocational learning
- Empower individuals to become effective professionals

Eaton can help fill the skills gap by providing training across a wide range of technical subjects, and using a variety of training media.

Training to suit your needs and budget

Decades of experience in designing MTL instrumentation products for process control applications contribute to Eaton's training and education resources. Free-of-charge "Lunch and Learn" seminars are available in many regions, and chargeable full-day training courses can be arranged on request. Live, internet-based webinars can also be staged for teams working across diverse geographies or time zones.

From technology through to application

Training materials are available to cover the full scope of Eaton's MTL products, and include:

- Explosion protection of electrical apparatus in flammable atmospheres
- Intrinsic safety design and installation
- FOUNDATION™ fieldbus connectivity and diagnostics
- Cyber security for process control
- Functional safety
- Industrial Ethernet, including intrinsically safe Ethernet solutions
- Surge protection

…plus a range of allied subjects and product-specific content.

So why not explore how Eaton can help develop your workforce? Contact your nearest Eaton office to discuss your training requirements







CROUSE-HINDS SERIES

B-LINE SERIES

Experts in Ex for 125+ years.

Eaton's Crouse-Hinds series and B-Line series are specialised portfolios of products and solutions for harsh and hazardous areas.



Full list of distributors and regional sales offices:

Crouse-Hinds series hazardous area communications

Crouse-Hinds series MTL process control and instrumentation

Crouse-Hinds series CEAG lighting, and power distribution and control

B-Line series mechanical support systems

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton Electric Ltd.
Great Marlings
Butterfield
Luton
Bedfordshire
LU2 8DL

©2026 Eaton
Printed in the United Kingdom
Crouse-Hinds series, EMEA
All Rights Reserved
May 2026
Issue A

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States

Eaton's Crouse-Hinds series
1201 Wolf Street
Syracuse, NY 13208

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

Powering Business Worldwide